

Ultrasonic measurement of water flow

Permanently installed ultrasonic clamp-on system for flow measurement of water

Features

- Watertight IP68 transducers housed inside the rugged stainless steel mounting fixtures, providing a highly reliable and long term durable solution for measuring at subsurface buried pipelines or at applications where the measurement point can be flooded
- Precise bidirectional, highly dynamic flow measurement, excellent zero-point stability and high reproducibility of measuring results
- Accurate and reliable flow measurement even at pipes with up to 6 % of solids or gaseous contents by volume (e.g., wastewater applications)
- Simple retrofitting solution for existing water networks without interrupting the supply or the need for costly shaft and pipe works
- Power supply selectable: 230 V AC or 24 V DC or 12 V DC (for remote power supply via e.g., solar panels)
- Transmission of measurement data from the data logger via RS232 serial interface
- Analog output 4 to 20 mA and 2 binary outputs (optorelay) available
- Modbus, BACnet and RS485 as communication protocols available

Applications

- Flow measurement at water and wastewater pipelines



FLUXUS F501




PermaLok



PermaRail


Transmitter

Technical data


	FLUXUS F501 /D501MQ	FLUXUS F501 /D501PK
		
design	field device with 1 measuring channel	
transducers	CDM2L**, CDP2L**, CDQ2L**	CDK1L**, CDM2L**, CDP2L**
measurement		
measurement principle	transit time difference correlation principle	
flow velocity	ft/s	0.03 to 82
repeatability	0.25 % of reading \pm 0.03 ft/s	
fluid	<ul style="list-style-type: none"> • water • glycol/H₂O: 20 %, 30 %, 40 %, 50 % 	
measurement uncertainty (volumetric flow rate) ¹	\pm 1.5 % of reading \pm 0.03 ft/s	
transmitter		
power supply	<ul style="list-style-type: none"> • 100 to 230 V/50 to 60 Hz or • 20 to 32 V DC or • 11 to 16 V DC (without backlight) 	
power consumption	W	< 10
number of measuring channels		1
damping	s	0 to 100 (adjustable)
measuring cycle	Hz	10
response time	s	1
housing material	aluminum, powder coated	
degree of protection	NEMA 4	
dimensions	in	see dimensional drawing
weight	lb	3.3
fixation	wall mounting, optional: 2" pipe mounting	
ambient temperature	°F	14 to +140
display	2 x 16 characters, dot matrix, backlight	
menu language	English, German, French, Dutch, Spanish	
measuring functions		
physical quantities	volumetric flow rate, mass flow rate, flow velocity	
totalizer	volume, mass	
communication interfaces		
service interfaces	<ul style="list-style-type: none"> • RS232 • USB (with adapter) 	
process interfaces	max. 1 option: <ul style="list-style-type: none"> • RS485 (sender) • Modbus RTU, sender (switchable) • BACnet MS/TP, sender (switchable) 	
accessories		
serial data kit	<ul style="list-style-type: none"> • cable • adapter 	
software	<ul style="list-style-type: none"> • FluxDiagReader: download of measured values and parameters, graphical presentation • FluxDiag (optional): download of measurement data, graphical presentation, report generation 	
data logger		
loggable values	all physical quantities and totalized values	
capacity	> 100 000 measured values	
outputs		
	The outputs are galvanically isolated from the transmitter.	
• current output		
number		1
range	mA	0/4 to 20
accuracy	0.1 % of reading \pm 15 μ A	
active output		R _{ext} < 500 Ω
• binary output		
number		2
optorelay		28 V/100 mA
binary output as alarm output		
• functions	limit, change of flow direction or error	
binary output as pulse output		
• functions	mainly for totalizing	
• pulse value	units	0.01 to 1000
• pulse width	ms	80 to 1000

¹ for reference conditions and $v > 0.82$ ft/s, with transducer module


Dimensions

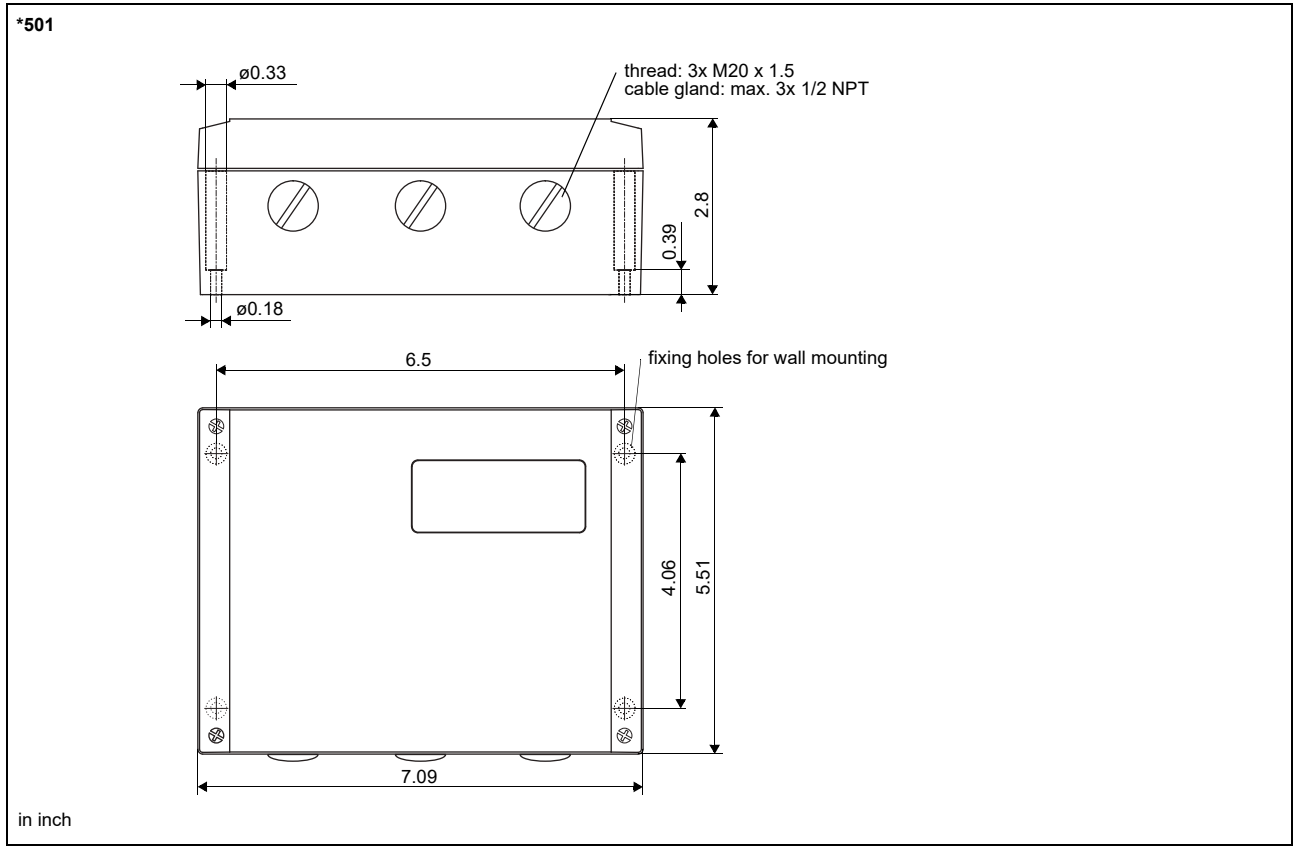

2" pipe mounting kit

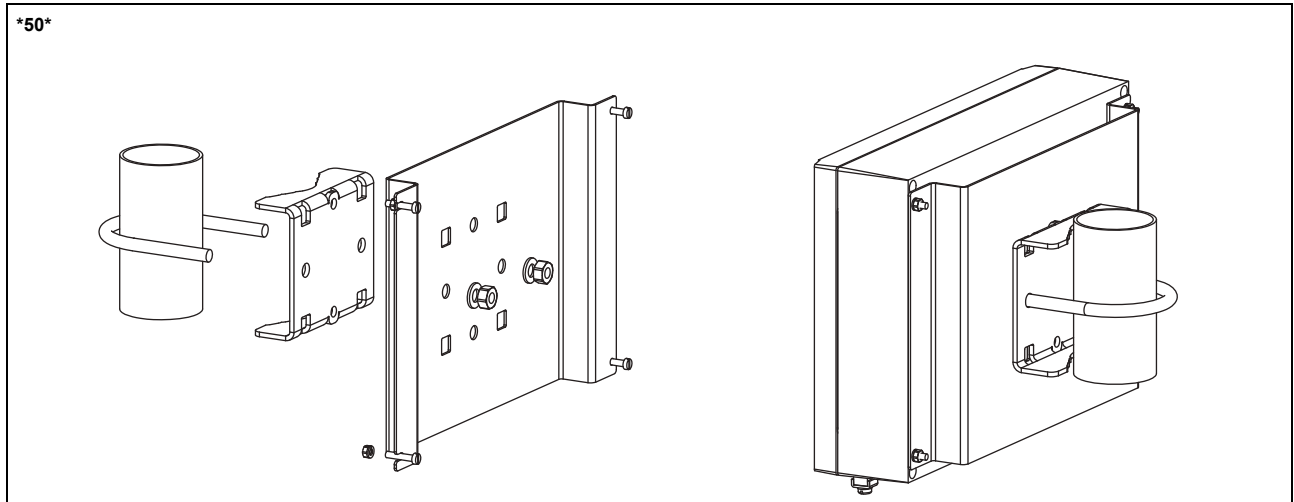

Terminal assignment

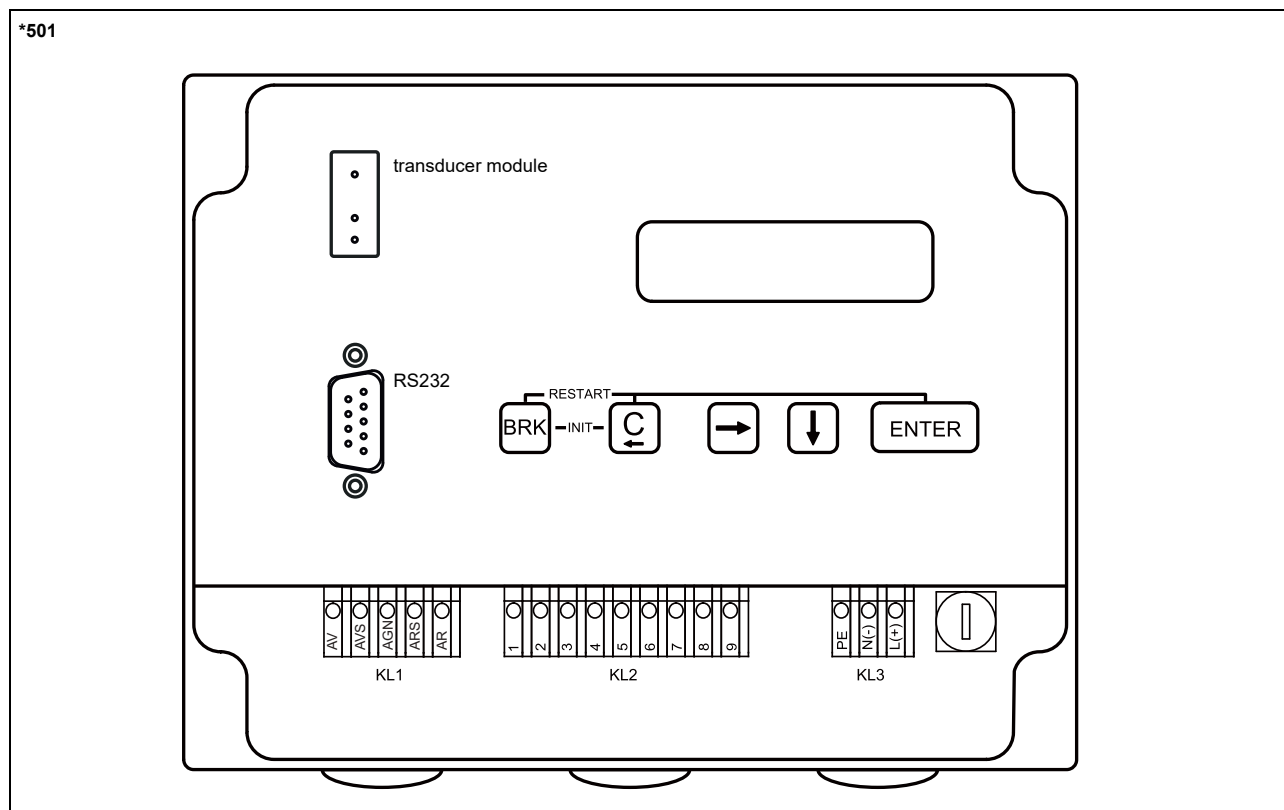


power supply ¹				
terminal	connection (AC)		connection (DC)	
PE	earth		earth	
N(-)	neutral		-	
L(+)	phase		+	
transducers, extension cable				
terminal	connection		transducer	
AV	signal		↑	
AVS	internal shield			
ARS	internal shield		↕	
AR	signal			
cable gland	external shield		↑ ↕	
outputs ¹				
terminal	connection	terminal	connection	communication interface
1(-), 2(+)	binary output B1	8(+)	signal +	<ul style="list-style-type: none"> • RS485 • Modbus RTU • BACnet MS/TP
3(-), 4(+)	binary output B2	7(-)	signal -	
5(-), 6(+)	current output I1	9	shield	

¹ cable (by customer): e.g., flexible leads, with insulated wire end ferrules, lead cross sectional area: AWG14 to 24

Transducers

Transducer selection


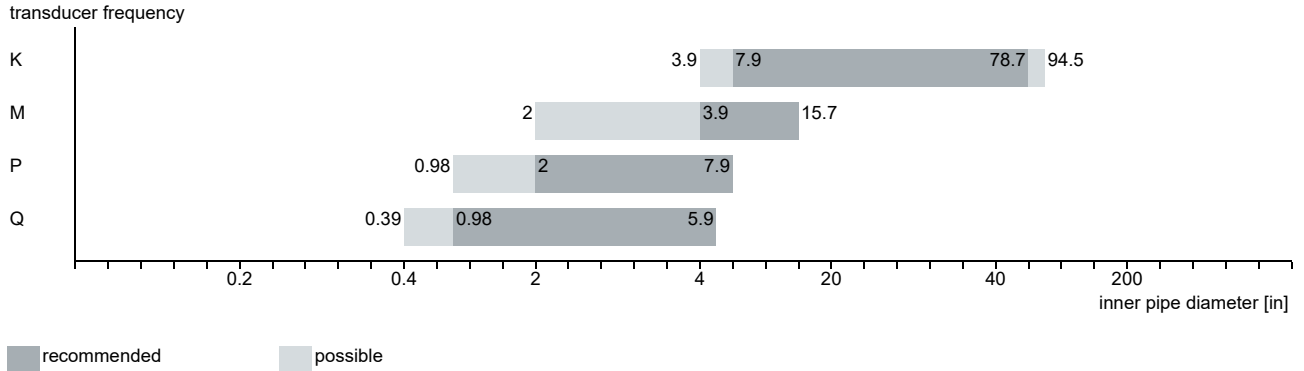


Technical data

Shear wave transducers




technical type		CDK1LZ7	CDM2LZ1	CDP2LZ1	CDQ2LZ1
transducer frequency	MHz	0.5	1	2	4
inner pipe diameter d					
min. extended	in	3.9	2	0.98	0.39
min. recommended	in	7.9	3.9	2	0.98
max. recommended	in	78.7	15.7	7.9	5.9
max. extended	in	94.5	-	-	-
pipe wall thickness					
min.	in	0.2	0.1	0.05	0.02
material					
housing		PEEK with stainless steel cap 316Ti	PEEK with stainless steel cap 316L		
contact surface		PEEK			
degree of protection		NEMA 6			
transducer cable					
type		2606			
length	ft	32			
length (**-*****/LC)	ft	65			
dimensions					
length l	in	4.98	2.52	1.57	
width b	in	2.01	1.26	0.87	
height h	in	2.66	1.59	1	
dimensional drawing					
weight (without cable)	lb	0.79	0.15	0.04	
pipe surface temperature					
min.	°F	-40			
max.	°F	+212			
ambient temperature					
min.	°F	-40			
max.	°F	+212			

Shear wave transducers (IP68)

technical type		CDK1L18	CDM2L18	CDP2L18
transducer frequency	MHz	0.5	1	2
inner pipe diameter d				
min. extended	in	3.9	3.1	0.98
min. recommended	in	7.9	3.9	2
max. recommended	in	78.7	15.7	7.9
max. extended	in	94.5	-	-
pipe wall thickness				
min.	in	0.2	0.1	0.05
material				
housing		PEEK with stainless steel cap 316Ti	PEEK with stainless steel cap 316Ti	
contact surface		PEEK	PEEK	
degree of protection		IP68 ¹	IP68 ¹	
transducer cable				
type		2550	2550	
length	ft	39	39	
dimensions				
length l	in	5.12	2.76	
width b	in	2.13	1.26	
height h	in	3.29	1.81	
dimensional drawing				
weight (without cable)	lb	0.95	0.19	
pipe surface temperature				
min.	°F	-40	-40	
max.	°F	+212	+212	
ambient temperature				
min.	°F	-40	-40	
max.	°F	+212	+212	

¹ test conditions: 3 months/29 psi (65 ft)/36 °F


Transducer mounting fixture
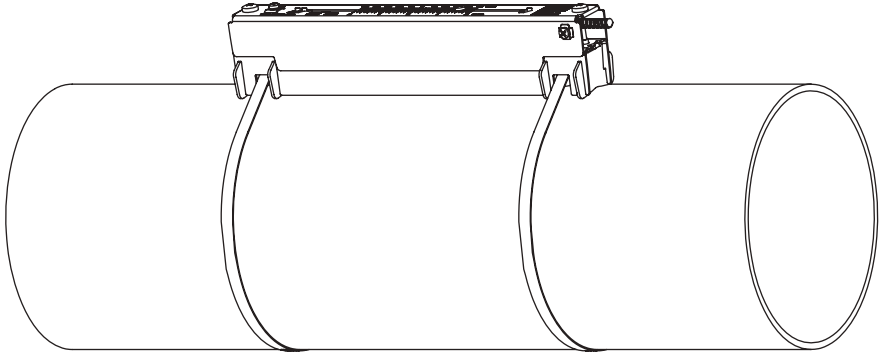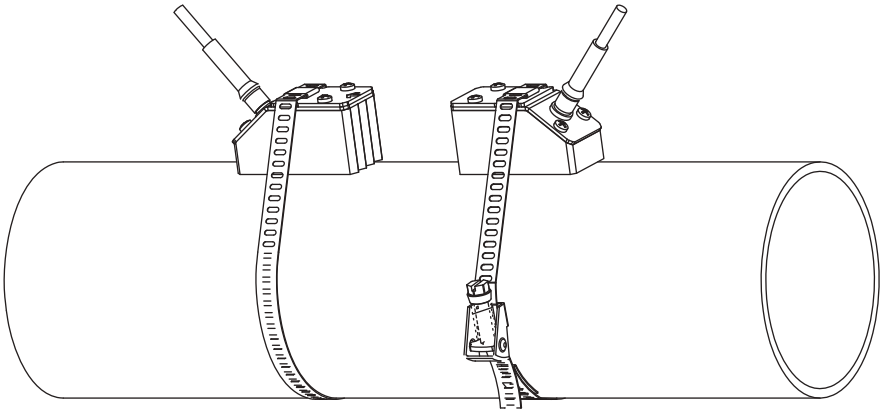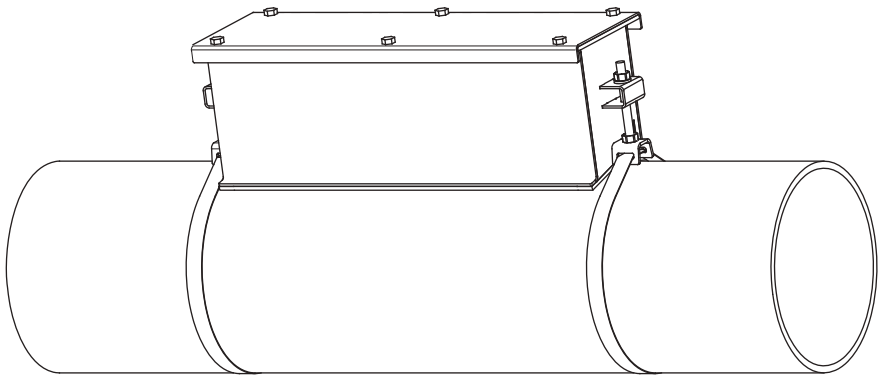
<p>PermaRail (VLK, VLM, VLQ)</p> 	<p>material: stainless steel 316Ti, 316L, 17-7PH inner length: VLK: 13.7 in VLM: 9.2 in VLQ: 6.9 in dimensions: VLK: 16.65 x 3.54 x 3.66 in VLM: 12.17 x 2.24 x 2.48 in VLQ: 9.72 x 1.69 x 1.85 in transducers: CD**LZ1, CDK1LI8</p>
<p>quick release clasps and tension straps</p> 	<p>material: stainless steel 410, 200</p>
<p>PermaLok PL</p> 	<p>material: stainless steel 316 transducers: CDM2LI8, CDP2LI8</p>

Coupling materials for transducers

type	ambient temperature °F
coupling compound type N	-22 to +266
coupling pad type VT	14 to +392

Connection systems

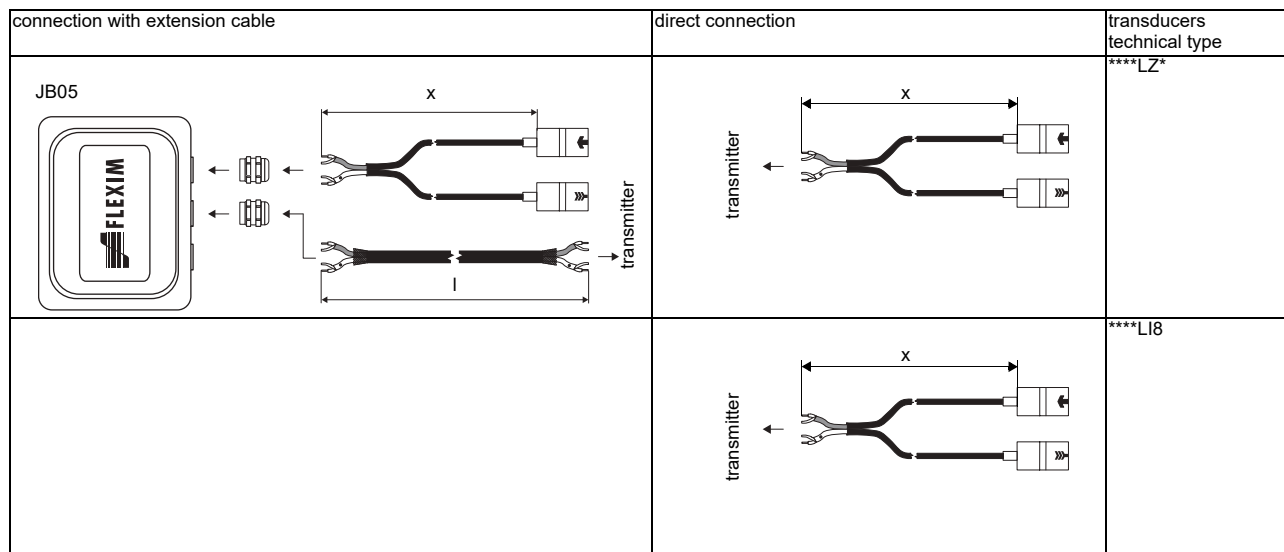

Cable

transducer cable			
type		2606	2550
weight	lb/ft	0.07	0.02
ambient temperature	°F	-40 to +212	-40 to +212
properties			longitudinal watertight
cable jacket			
material		PUR	PUR
outer diameter	in	0.2	0.2 ±0.01
thickness	in		0.04
color		gray	gray
shield		x	x

extension cable			
type		2551	2615
weight	lb/ft	0.06	0.12
ambient temperature	°F	-13 to +176	-22 to +158
properties			halogen free fire propagation test according to IEC 60332-1 combustion test according to IEC 60754-2
cable jacket			
material		TPE-O	PUR
outer diameter	in	0.31	max. 0.47
thickness	in		0.08
color		black	black
shield		x	x

Cable length

transducer frequency		K		M, P		Q	
transducers technical type		x	l	x	l	x	l
CDK1LZ7	ft	32	≤ 295	-	-	-	-
CD*2LZ1	ft	-	-	32	≤ 295	32	≤ 295
****LJ*	ft	39 ¹	-	39 ¹	-	-	-

¹ others on request

x = transducer cable length


l = max. length of extension cable (depending on application)

Junction box

Technical data


JB05			Connection																		
weight	lb	2.6 lb																			
fixation		wall mounting optional: 2" pipe mounting																			
material																					
housing		stainless steel 316L																			
gasket		silicone	Transducers <table border="1"> <thead> <tr> <th>terminal strip</th> <th>terminal</th> <th>connection</th> <th>transducer</th> </tr> </thead> <tbody> <tr> <td rowspan="4">KL1</td> <td>V</td> <td>signal</td> <td>↑</td> </tr> <tr> <td>VS</td> <td>internal shield</td> <td></td> </tr> <tr> <td>RS</td> <td>internal shield</td> <td>↕</td> </tr> <tr> <td>R</td> <td>signal</td> <td></td> </tr> </tbody> </table>		terminal strip	terminal	connection	transducer	KL1	V	signal	↑	VS	internal shield		RS	internal shield	↕	R	signal	
terminal strip	terminal	connection			transducer																
KL1	V	signal			↑																
	VS	internal shield																			
	RS	internal shield	↕																		
	R	signal																			
degree of protection		IP67	Extension cable <table border="1"> <thead> <tr> <th>terminal strip</th> <th>terminal</th> <th>connection</th> </tr> </thead> <tbody> <tr> <td rowspan="4">KL2</td> <td>TV</td> <td>signal</td> </tr> <tr> <td>TVS</td> <td>internal shield</td> </tr> <tr> <td>TRS</td> <td>internal shield</td> </tr> <tr> <td>TR</td> <td>signal</td> </tr> </tbody> </table>		terminal strip	terminal	connection	KL2	TV	signal	TVS	internal shield	TRS	internal shield	TR	signal					
terminal strip	terminal	connection																			
KL2	TV	signal																			
	TVS	internal shield																			
	TRS	internal shield																			
	TR	signal																			
ambient temperature																					
min.	°F	-40																			
max.	°F	+176																			

Dimensions

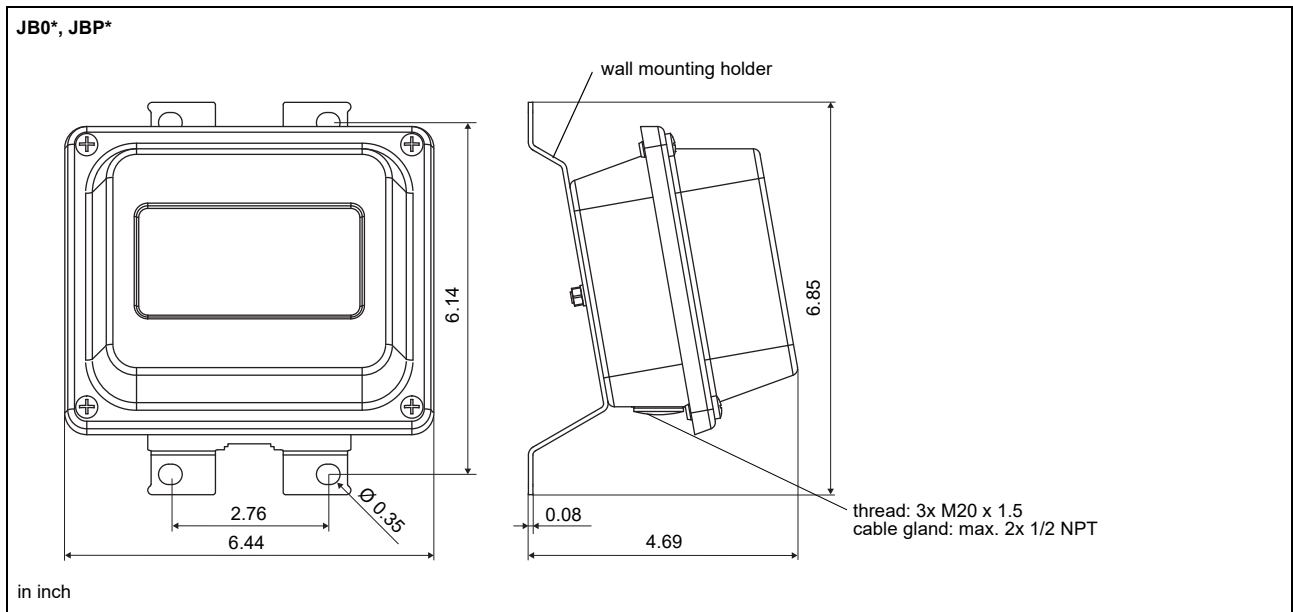

2" pipe mounting kit

JB**

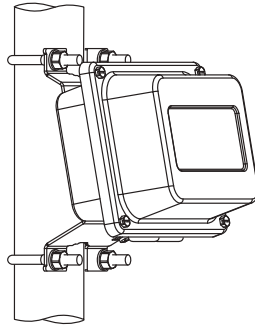

FLEXIM AMERICAS Corporation
Edgewood, NY 11717
USA

Tel.:(631) 492-2300
Fax:(631) 492-2117

internet: www.flexim.com
e-mail: usinfo@flexim.com

1-888-852-7473

Subject to change without notification. Errors excepted.
FLUXUS is a registered trademark of FLEXIM GmbH.

Copyright (©) FLEXIM GmbH 2019