

Portable ultrasonic flow measurement of liquids

Portable instrument for non-invasive, quick flow and energy measurement with clamp-on technology for all types of piping

Features

- Transmitterconfigurable for flow and thermal energy measurement
 - Flow measurement for all acoustically penetrable fluids
 - Integrated thermal energy measurement for a typical heat and refrigerating agents
 - Temperature range -40 to+392 °F, with WaveInjector max. +752 °F
- Precise bidirectional and highly dynamic flow measurement with the non-invasive clamp-on technology
- Calibrated transducers and transmitters with traceable certificates
- Automatic loading of calibration data and transducer detection for a fast and easy set-up (less than 5 min), providing precise and long-term stable results
- High precision at fast and slow flow rates, high temperature and zero point stability
- Portable, easy-to-use flow transmitter with 2 flow channels, multiple inputs/outputs, an integrated data logger with a serial interface
- Integrated wall thickness measurement with connectable wall thickness probe
- The transmitter is water and dust-tight (NEMA 4), resistant against oil, many liquids and dirt
- Robust, water-tight (NEMA 4) transport case with comprehensive accessories
- Li-Ion battery provides up to 25 hours of measurement operation
- User-friendly design
- QuickFix for a simple and fast transmitter fixation, e.g., on pipes

Applications

Designed for harsh environments and applicable in all areas such as drinking water and sewerage industry, power plants, producing industry, food industry and many more

Example applications:

- Operation measurements
- Data gathering in energy management and certifications according to ISO 50001
- Survey of pump performances
- Hydraulic balancing
- Verification of installed measuring systems
- Supervision of permanently installed meters, service and maintenance



FLUXUS F601



Measurement with transducers mounted with mounting frames and flow transmitter fixed to the pipe with the QuickFix pipe mounting fixture



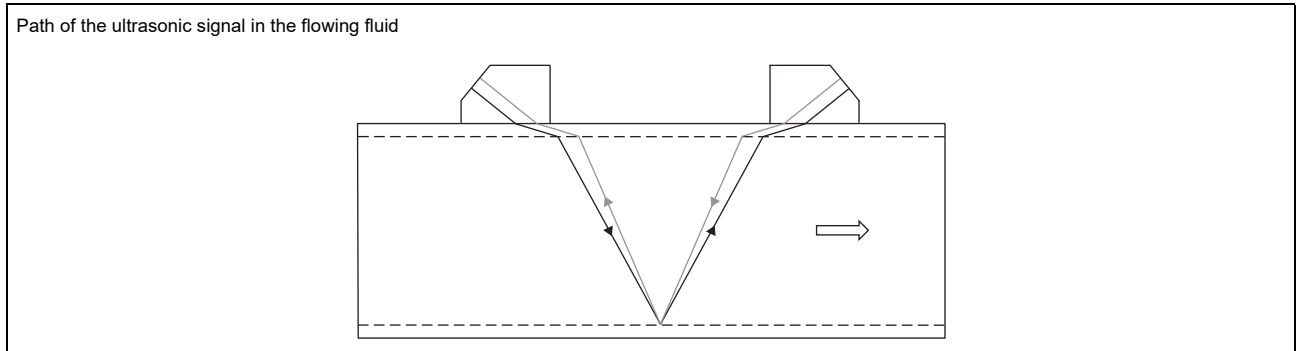
Measurement equipment in transport case

Function	3
Measurement principle	3
Calculation of volumetric flow rate	3
Number of sound paths	4
Typical measurement setup	5
Transmitter	6
Technical data	6
Dimensions	7
Standard scope of supply	8
Adapters	8
Example for the equipment of a transport case	9
Transducers	10
Transducer selection	10
Transducer order code	11
Technical data	12
Transducer mounting fixture	14
Coupling materials for transducers	17
Connection systems	18
Clamp-on temperature probe (optional)	19
Technical data	19
Fixation	20
Wall thickness measurement (optional)	21
Technical data	21

Function

Measurement principle

The transducers are mounted on the pipe which is completely filled with the fluid. The ultrasonic signals are emitted alternately by a transducer and received by the other. The physical quantities are determined from the transit times of the ultrasonic signals.




Transit time difference principle

As the fluid where the ultrasound propagates is flowing, the transit time of the ultrasonic signal in flow direction is shorter than the one against the flow direction.

The transit time difference Δt is measured and allows the flowmeter to determine the average flow velocity along the propagation path of the ultrasonic signals. A flow profile correction is then performed in order to obtain the area averaged flow velocity, which is proportional to the volumetric flow rate.

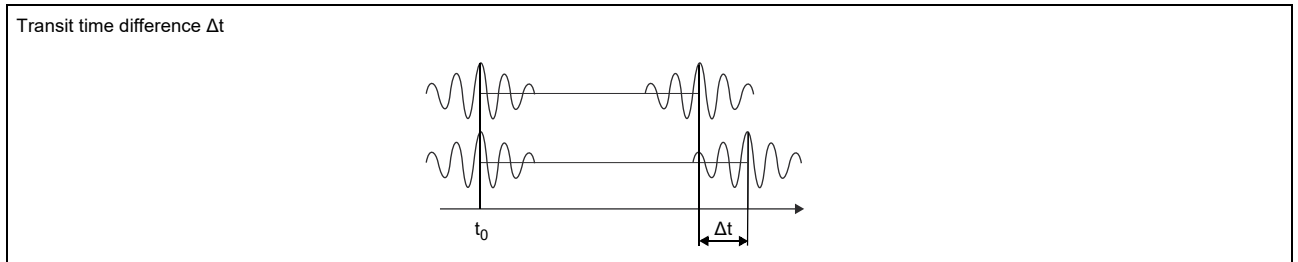The integrated microprocessors control the entire measuring cycle. The received ultrasonic signals are checked for measurement usability and evaluated for their reliability. Noise signals are eliminated.



HybridTrek

If the gaseous or solid content in the fluid increases occasionally during measurement, a measurement with the transit time difference principle may no longer be possible. NoiseTrek mode will then be selected by the flowmeter. This measurement method allows the flowmeter to achieve a stable measurement even with high gaseous or solid content.

The transmitter can switch automatically between transit time and NoiseTrek mode without any changes to the measurement setup.

Calculation of volumetric flow rate

$$\dot{V} = k_{Re} \cdot A \cdot k_a \cdot \frac{\Delta t}{2 \cdot t_y}$$

where

- \dot{V} - volumetric flow rate
- k_{Re} - fluid mechanics calibration factor
- A - cross-sectional pipe area
- k_a - acoustical calibration factor
- Δt - transit time difference
- t_y - average of transit times in the fluid

Number of sound paths

The number of sound paths is the number of transits of the ultrasonic signal through the fluid in the pipe. Depending on the number of sound paths, the following methods of installation exist:

- **reflect arrangement**

The number of sound paths is even. The transducers are mounted on the same side of the pipe. Correct positioning of the transducers is easier.

- **diagonal arrangement**

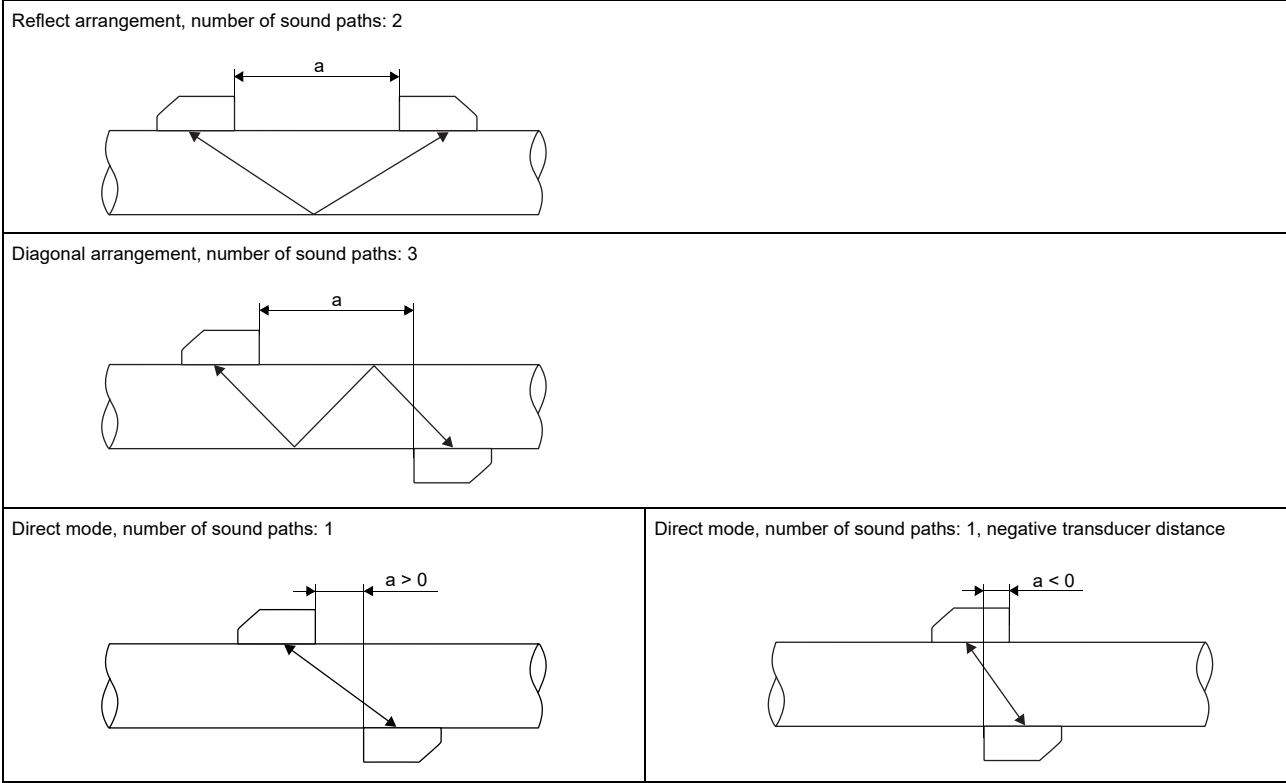
The number of sound paths is odd. The transducers are mounted on opposite sides of the pipe.

- **direct mode**

Diagonal arrangement with 1 sound path. This should be used in the case of a high signal attenuation by the fluid, pipe or coatings.


The preferred method of installation depends on the application. While increasing the number of sound paths increases the accuracy of the measurement, signal attenuation increases as well. The optimum number of sound paths for the parameters of the application will be determined automatically by the transmitter.

As the transducers can be mounted with the transducer mounting fixture in reflect arrangement or diagonal arrangement, the number of sound paths can be adjusted optimally for the application.




a - transducer distance

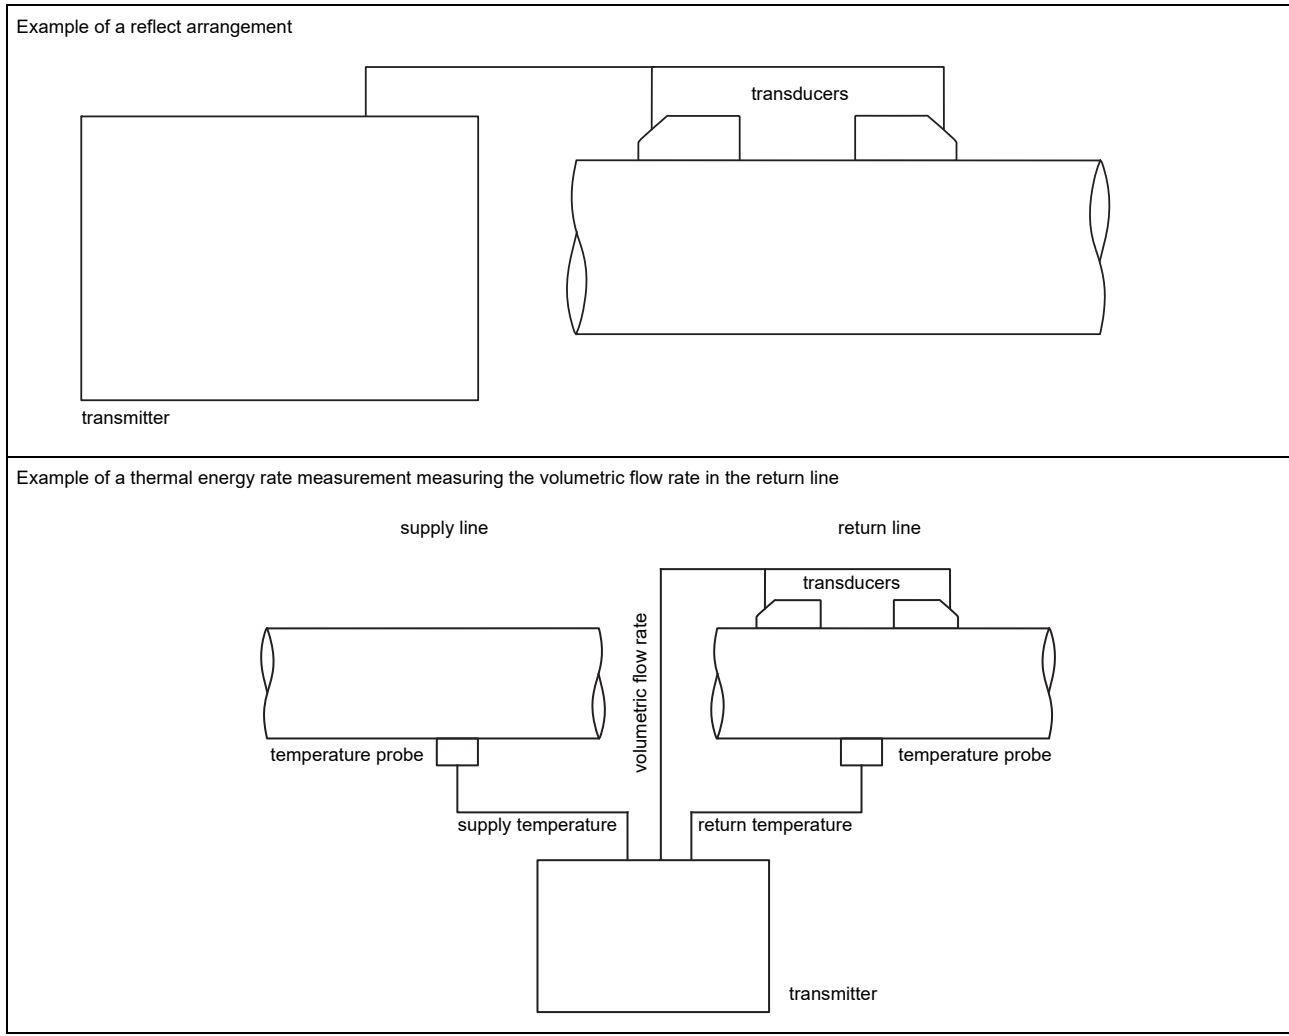Typical measurement setup



Transmitter

Technical data

		FLUXUS F601
		
design		portable
measurement		
measurement principle		transit time difference correlation principle, automatic NoiseTrek selection for measurements with high gaseous or solid content
flow velocity	ft/s	0.03 to 82
repeatability		0.15 % of reading ± 0.02 ft/s
fluid		all acoustically conductive liquids with < 10 % gaseous or solid content in volume (transit time difference principle)
temperature compensation		corresponding to the recommendations in ANSI/ASME MFC-5.1-2011
measurement uncertainty (volumetric flow rate)		
measurement uncertainty of measuring system ¹		± 0.3 % of reading ± 0.02 ft/s includes calibration certificate traceable to NIST calibration facility ISO 17025 accredited
measurement uncertainty at the measuring point ²		± 1 % of reading ± 0.02 ft/s
transmitter		
power supply		<ul style="list-style-type: none"> • 100 to 230 V/50 to 60 Hz (power supply unit: IP40, 32 to 104 °F) • 10.5 to 15 V DC (socket at transmitter) • integrated battery
integrated battery		Li-Ion, 7.2 V/6.2 Ah
operating time	h	<ul style="list-style-type: none"> • > 14 (without outputs, inputs and backlight) • > 25 (1 measuring channel, ambient temperature > 50 °F, without outputs, inputs and backlight)
power consumption	W	< 6 (with outputs, inputs and backlight), charging: 18
number of measuring channels		2
damping	s	0 to 100 (adjustable)
measuring cycle	Hz	100 to 1000 (1 channel)
response time	s	1 (1 channel), option: 0.07
housing material		PA, TPE, AutoTex, stainless steel
degree of protection		NEMA 4
dimensions	in	see dimensional drawing
weight	lb	4.6
fixation		QuickFix pipe mounting fixture
ambient temperature	°F	14 to 140
display		2 x 16 characters, dot matrix, backlight
menu language		English, German, French, Dutch, Spanish
measuring functions		
physical quantities		volumetric flow rate, mass flow rate, flow velocity, thermal energy rate (if temperature inputs are installed)
totalizer		volume, mass, optional: thermal energy
calculation functions		average, difference, sum
diagnostic functions		sound speed, signal amplitude, SNR, SCNR, standard deviation of amplitudes and transit times
communication interfaces		
service interfaces		<ul style="list-style-type: none"> • RS232 • USB (with adapter)
process interfaces		• Modbus RTU (optional)
accessories		
serial data kit		RS232
• cable		RS232 - USB
• adapter		
software		<ul style="list-style-type: none"> • FluxDiagReader: download of measured values and parameters, graphical presentation • FluxDiag (optional): download of measurement data, graphical presentation, report generation
adapter		AO5, AO6, AO7, AO8, AI1, AI2
transport case		dimensions: 19.7 x 15.7 x 7.5 in
data logger		
loggable values		all physical quantities, totalized values and diagnostic values
capacity		> 100 000 measured values

¹ with aperture calibration of the transducers


² for transit time difference principle and reference conditions

FLUXUS F601	
outputs	
	The outputs are galvanically isolated from the transmitter.
number	see standard scope of supply, max. on request
• switchable current output	
	The switchable current outputs are menu selectable all together as passive or active.
range	mA 4 to 20 (3.2 to 24)
accuracy	0.04 % of reading $\pm 3 \mu\text{A}$
active output	$U_{\text{int}} = 24 \text{ V}$, $R_{\text{ext}} < 500 \Omega$
passive output	$U_{\text{ext}} = 8 \text{ to } 30 \text{ V}$, depending on R_{ext} ($R_{\text{ext}} < 900 \Omega$ at 30 V)
• frequency output	
range	kHz 0 to 5
open collector	24 V/4 mA
• binary output	
optorelay	26 V/100 mA
binary output as alarm output	
• functions	limit, change of flow direction or error
binary output as pulse output	
• functions	mainly for totalizing
• pulse value	units 0.01 to 1000
• pulse width	ms 1 to 1000
inputs	
	The inputs are galvanically isolated from the transmitter.
number	see standard scope of supply, max. 4
• temperature input	
type	Pt100/Pt1000
connection	4-wire
range	$^{\circ}\text{F}$ -238 to +1040
resolution	K 0.01
accuracy	$\pm 0.01 \%$ of reading $\pm 0.03 \text{ K}$
• current input	
accuracy	0.1 % of reading $\pm 10 \mu\text{A}$
passive input	$R_{\text{int}} = 50 \Omega$, $P_{\text{int}} < 0.3 \text{ W}$
• range	mA -20 to +20
• voltage input	
range	V 0 to 1
accuracy	0.1 % of reading $\pm 1 \text{ mV}$
internal resistance	$R_{\text{int}} = 1 \text{ M}\Omega$

¹ with aperture calibration of the transducers

² for transit time difference principle and reference conditions

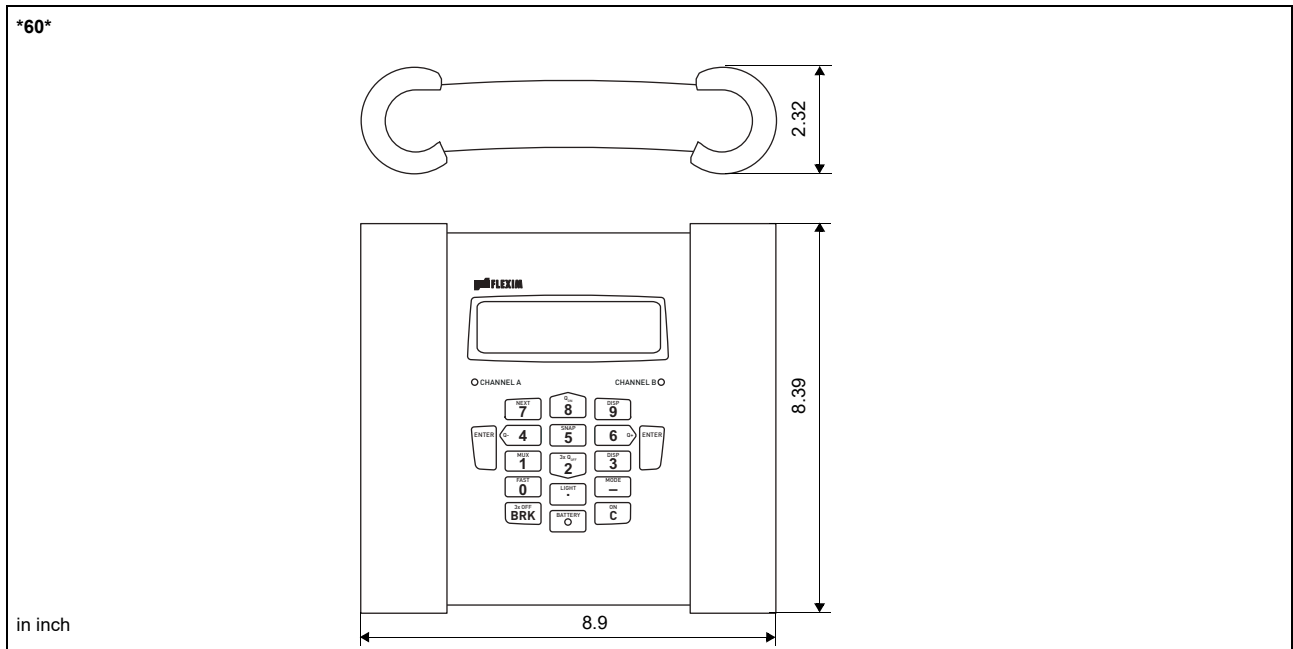
Dimensions



Standard scope of supply

	F601 Basic	F601 Energy
application	flow measurement of liquids	
	2 independent measuring channels, 2 calculation channels	
	wall thickness measurement (wall thickness probe to be ordered separately)	
		integrated thermal energy computer
		simultaneous monitoring of 2 energy flows
		temperature-compensated calculation of mass flow rate
outputs		
switchable current output	2	2
binary output	2	2
inputs		
temperature input	-	4
accessories		
transport case	x	x
power supply unit, mains cable	x	x
battery	x	x
adapter	AO6	AO6, AI1, AI2
QuickFix pipe mounting fixture for transmitter	x	x
serial data kit	x	x
measuring tape	x	x
user manual, Quick start guide	x	x

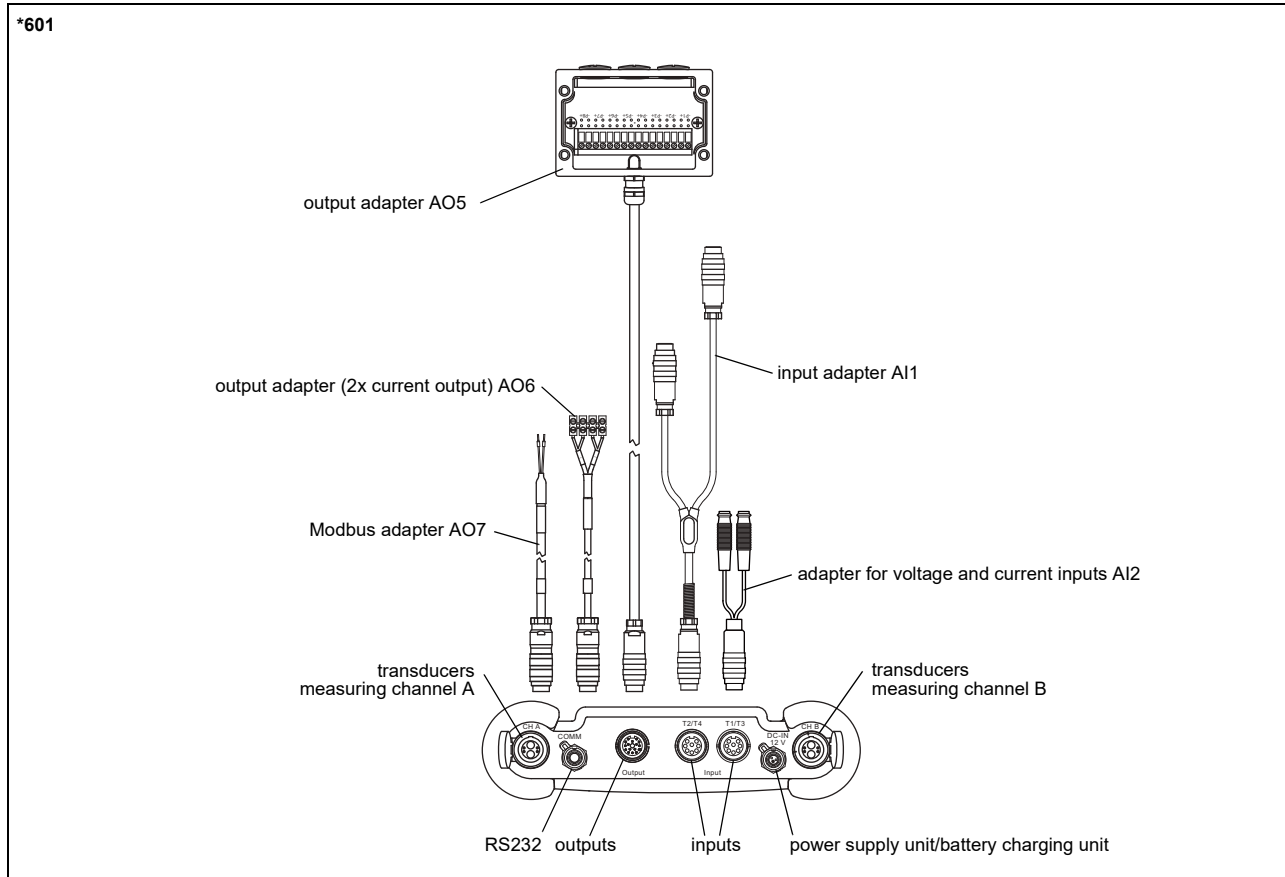Adapters





Example for the equipment of a transport case



Transducers

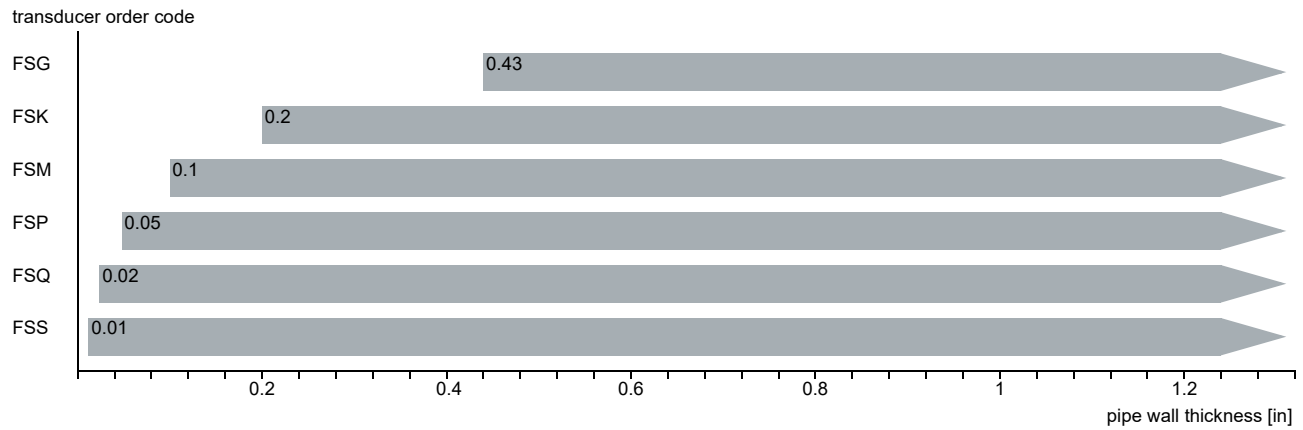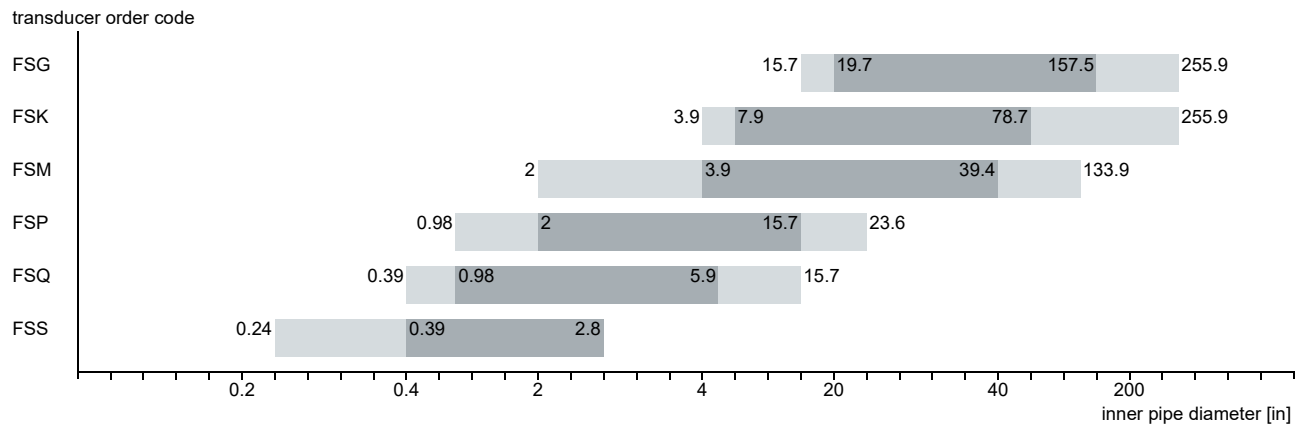Transducer selection







recommended
 possible

Transducer order code



1, 2	3	4	5, 6	7, 8	9 to 11	no. of character				
transducer	transducer frequency	-	ambient temperature	explosion protection	connection system	-	extension cable	/	option	description
FS										set of ultrasonic flow transducers for liquids measurement, shear wave
	G									0.2 MHz
	K									0.5 MHz
	M									1 MHz
	P									2 MHz
	Q									4 MHz
	S									8 MHz
			N							normal temperature range
			E							extended temperature range
				NN						not explosion proof
					NL					with Lemo connector
							XXX			0 m: without extension cable > 0 m: with extension cable
									LC	long transducer cable

Technical data

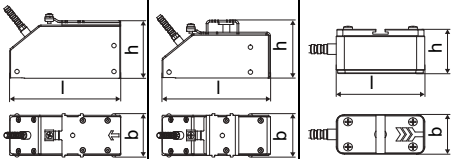Shear wave transducers (nonEx, NL)

order code		FSG-NNNNL/**	FSK-NNNNL/**	FSM-NNNNL/**	FSP-NNNNL/**	FSQ-NNNNL/**	FSS-NNNNL/**	
technical type		C(DL)G1NZ7	C(DL)K1NZ7	C(DL)M1NZ7	C(DL)P1NZ7	C(DL)Q1NZ7	CDS1NZ7	
transducer frequency	MHz	0.2	0.5	1	2	4	8	
inner pipe diameter d								
min. extended	in	15.7	3.9	2	0.98	0.39	0.24	
min. recommended	in	19.7	7.9	3.9	2	0.98	0.39	
max. recommended	in	157.5	78.7	39.4	15.7	5.9	2.8	
max. extended	in	255.9	255.9	133.9	23.6	15.7	2.8	
pipe wall thickness								
min.	in	0.43	0.2	0.1	0.05	0.02	0.01	
material								
housing		PEEK with stainless steel cap 304		stainless steel 304		stainless steel 304		
contact surface		PEEK		PEEK		PEI		
degree of protection		NEMA 6				NEMA 4		
transducer cable								
type		1699						
length	ft	16		13		9		
length (***/*****/LC)	ft	29						
dimensions								
length l	in	5.1	4.98	2.36		1.67	0.98	
width b	in	2.01	2.01	1.18		0.71	0.51	
height h	in	2.64	2.66	1.32		0.85	0.67	
dimensional drawing								
weight (without cable)	lb	1	0.79	0.08		0.03	0.01	
pipe surface temperature								
min.	°F	-40					-22	
max.	°F	+266					+266	
ambient temperature								
min.	°F	-40					-22	
max.	°F	+266					+266	
temperature compensation		x					-	

Shear wave transducers (nonEx, NL, extended temperature range)


order code		FSM-ENNNL/**	FSP-ENNNL/**	FSQ-ENNNL/**
technical type		C(DL)M1EZ7	C(DL)P1EZ7	C(DL)Q1EZ7
transducer frequency	MHz	1	2	4
inner pipe diameter d				
min. extended	in	2	0.98	0.39
min. recommended	in	3.9	2	0.98
max. recommended	in	39.4	15.7	5.9
max. extended	in	133.9	23.6	15.7
pipe wall thickness				
min.	in	0.1	0.05	0.02
material				
housing		stainless steel 304		
contact surface		Sintimid		
degree of protection		NEMA 4		
transducer cable				
type		1699		
length	ft	13		9
length (***.*****/LC)	ft	29		
dimensions				
length l	in	2.36		1.67
width b	in	1.18		0.71
height h	in	1.32		0.85
dimensional drawing				
weight (without cable)	lb	0.09		0.02
pipe surface temperature				
min.	°F	-22		
max.	°F	+392		
ambient temperature				
min.	°F	-22		
max.	°F	+392		
temperature compensation		x		

Transducer mounting fixture

Order code

1, 2	3	4	5	6	7 to 9	no. of character
transducer mounting fixture	transducer	measurement	size	fixation	outer pipe diameter	description
FS						mounting frames
LM						ladder chain mounting accessory
VP						portable Variofix
TB						tension belts
WL						transducer box for WaveInjector
	A					all transducers
	K					transducers with transducer frequency G, K
	M					transducers with transducer frequency M, P
	Q					transducers with transducer frequency Q
	S					transducers with transducer frequency S
		D				reflect arrangement or diagonal arrangement/direct mode
		R				reflect arrangement
			S			small
			M			medium
				C		chains
				N		without fixation
					L08	0.5 to 8 in
					L22	0.5 to 22 in
					010	0.39 to 3.9 in
					025	0.39 to 9.8 in
					055	0.39 to 21.7 in
					150	2 to 59.1 in
					210	2 to 82.7 in

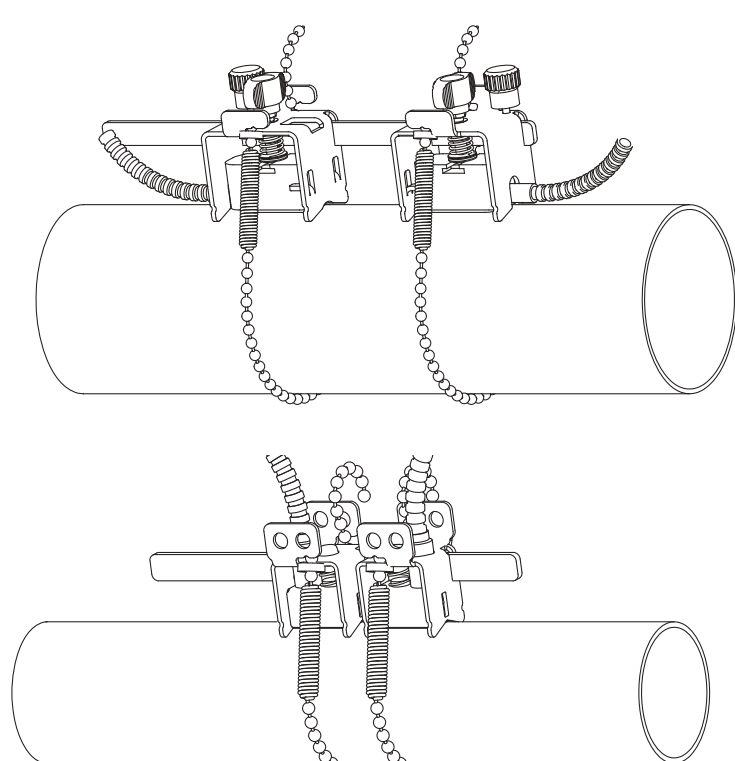mounting frames FS and chains



transducer frequency: M, P, Q

material: stainless steel 304, 301, 303

dimensions:
 M, P: 16.54 x 1.89 x 2.68 in
 Q: 16.54 x 1.69 x 2.28 in

chain length: 1/3/6 ft

outer pipe diameter:
 max. 5.9/12.2/23.6 in

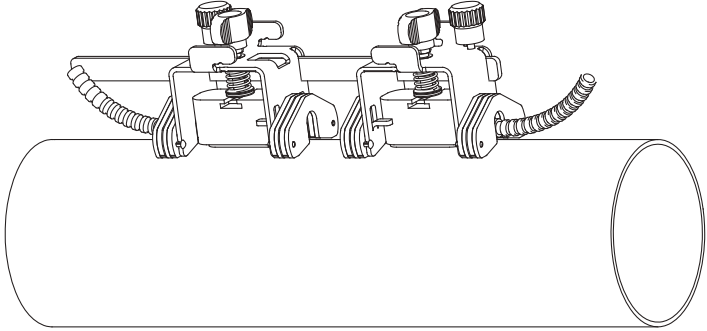
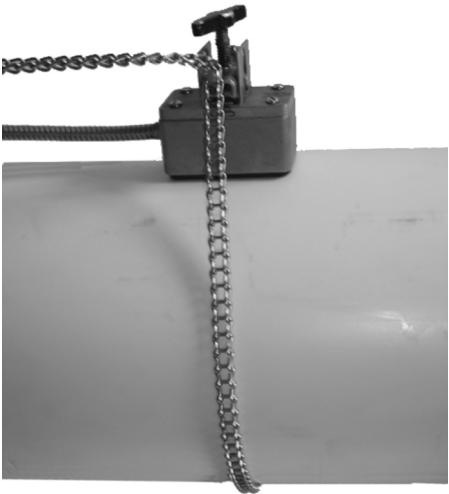
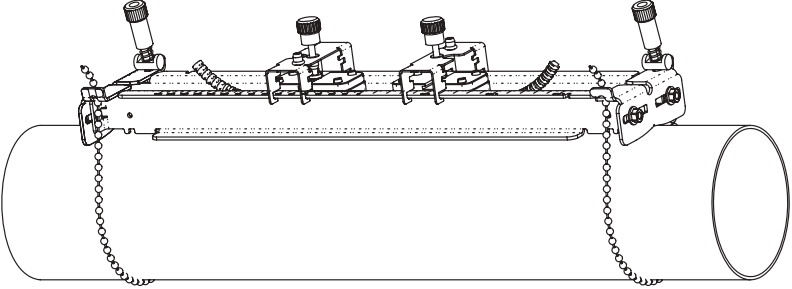
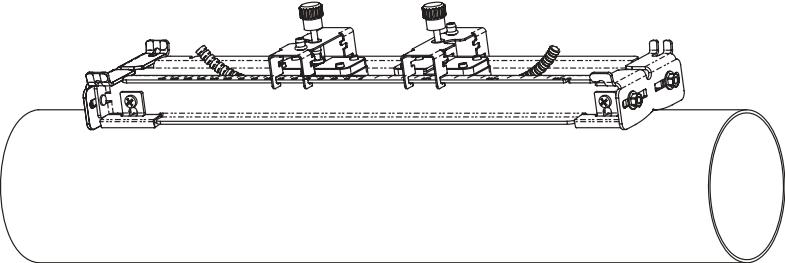
transducer frequency: S



material: stainless steel 304, 301, 303

dimensions:
 8.27 x 1.26 x 1.73 in

chain length: 1 ft

outer pipe diameter:
 max. 5.9 in

<p>mounting frames FS and magnet (optional)</p> 	<p>material: stainless steel 304, 301, 303 dimensions: M, P: 16.54 x 1.89 x 2.68 in Q: 16.54 x 1.69 x 2.28 in</p>
<p>ladder chain mounting accessory LM</p> 	<p>transducer frequency: M, P, Q chain length: 30/78 in outer pipe diameter: max. 24 in</p>
<p>portable Variofix VP and chains (optional)</p> 	<p>material: stainless steel 304, 301, 303 dimensions: 16.3 x 3.7 x 2.99 in chain length: 6 ft</p>
<p>portable Variofix VP and magnet (optional)</p> 	<p>material: stainless steel 304, 301, 303 dimensions: 16.3 x 3.7 x 1.57 in</p>
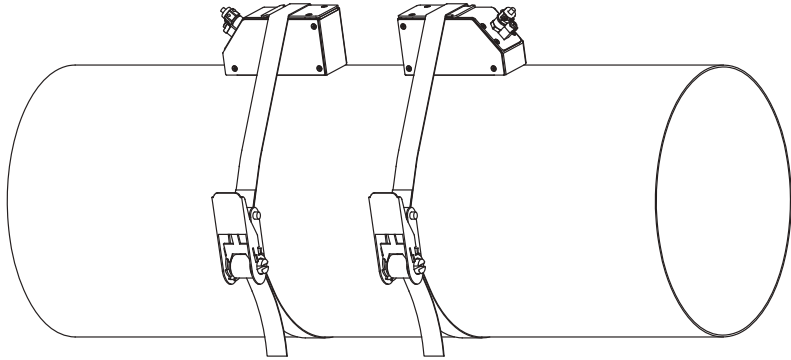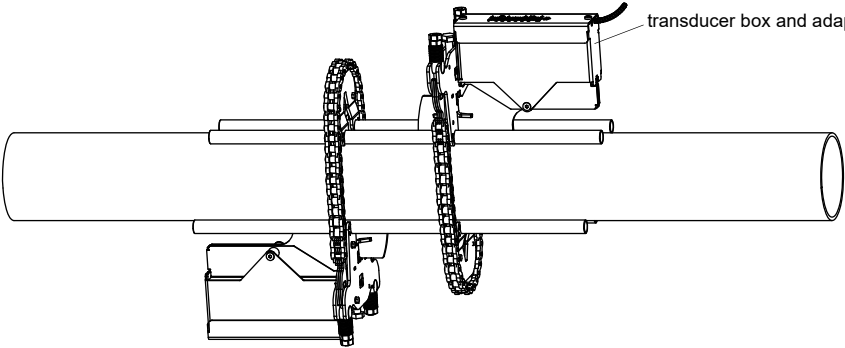
<p>tension belts TB</p>  <p>A technical drawing showing a cylindrical pipe with two tension belts (TB) wrapped around it. Each belt is held in place by a metal bracket with a bolt. The belts are shown in a slightly curved position, suggesting they are under tension.</p>	<p>transducer frequency: G, K</p> <p>material: steel, powder coated and textile tension belt</p> <p>length: 16/22 ft</p> <p>ambient temperature: max. 140 °F</p> <p>outer pipe diameter: max. 59.1/82.7 in</p>
<p>transducer box WL for WaveInjector</p>  <p>A technical drawing of a transducer box (WL) for a WaveInjector. The box is mounted on a horizontal pipe. It features a complex internal mechanism with gears and a chain drive. A label 'transducer box and adapter' points to the main assembly. The drawing shows the box from a side perspective, highlighting its mechanical components.</p>	<p>see Technical specification TSWaveInjectorVx-x</p>

Coupling materials for transducers

normal temperature range (4th character of transducer order code = N)		extended temperature range (4th character of transducer order code = E)		WaveInjector WI-400	
< 212 °F	< 338 °F	< 302 °F	< 392 °F	< 536 °F	536 to 752 °F
coupling compound type N	coupling compound type E	coupling compound type E	coupling compound type E or H	coupling pad type A and coupling pad type VT	coupling pad type B and coupling pad type VT

Technical data

type	ambient temperature °F
coupling compound type N	-22 to +266
coupling compound type E	-22 to +392
coupling compound type H	-22 to +482
coupling pad type A	max. 536
coupling pad type B	536 to 752
coupling pad type VT	14 to +392

coupling pad not to be used for transducer mounting fixture with magnets

Connection systems

connection system NL	
direct connection/connection with extension cable	transducers technical type
	*****Z7

Cable

transducer cable		
type		1699
weight	lb/ft	0.06
ambient temperature	°F	-67 to +392
cable jacket		
material		PTFE
outer diameter	in	0.11
thickness	in	0.01
color		brown
shield		x
sheath		
material		stainless steel 304
outer diameter	in	0.31

extension cable			
type		1750	2551
standard length	ft	16 32	-
max. length	ft	32	see table below
weight	lb/ft	0.08	0.06
ambient temperature	°F	< 144	-13 to +176
cable jacket			
material		PE	TPE-O
outer diameter	in	0.24	0.31
thickness	in	0.02	
color		black	black
shield		x	x
sheath			
material		stainless steel 304	-
outer diameter	in	0.35	-
remark		optional	

Cable length

transducer frequency		F, G, H, K			M, P			Q			S		
connection system NL													
transducers technical type		x	y	l	x	y	l	x	y	l	x	y	l
*D***Z7 ¹	ft	6	9	≤ 82	6	6	≤ 82	6	3	≤ 82	3	3	≤ 65
option LC: *L***Z7 ¹	ft	6	22	≤ 82	22	6	≤ 82	26	3	≤ 82	-	-	-

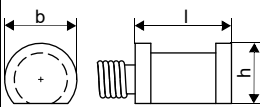


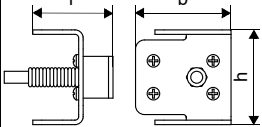


¹ l > 82 to 328 ft on request

x, y = transducer cable length



l = max. length of extension cable

Clamp-on temperature probe (optional)

Technical data

PT13N				
design	clamp-on with connector			
type	Pt1000			
connection	4-wire			
measuring range	°F -40 to +392			
accuracy T	$\pm(0.27\text{ }^\circ\text{F} + 2 \cdot 10^{-3} \cdot (T\text{ [}^\circ\text{F}] - 32\text{ }^\circ\text{F})$) class A			
accuracy ΔT (2x Pt matched according to EN 1434-1)	$\leq 0.03\text{ }^\circ\text{F}$ (at 50 °F)			
housing	360 brass alloy			
degree of protection	NEMA 4			
dimensions				
length l	in 0.79			
width b	in 0.59			
height h	in 0.49			
dimensional drawing				
weight	lb 0.437 (without connector)			
accessories				
thermal conductivity foil 482 °F	x			
Connection system				
direct connection/connection with extension cable				
				
Connection				
	temperature probe	extension cable	connector	
	red	black	2	
	red	green	6	
	white	white	1	
	white	red	7	
Cable				
	temperature probe	extension cable		
type	4 x 24 AWG	4 x 18 AWG		
standard length	ft 20	-		
max. length	ft -	656		
cable jacket	PTFE	LS PVC		
PT13F				
design	clamp-on short response time, with connector			
type	Pt1000			
connection	4-wire			
measuring range	°F -58 to +482			
accuracy T	$\pm(0.27\text{ }^\circ\text{F} + 2 \cdot 10^{-3} \cdot (T\text{ [}^\circ\text{F}] - 32\text{ }^\circ\text{F})$) class A			
accuracy ΔT (2x Pt matched according to EN 1434-1)	$\leq 0.1\text{ K}$ ($3\text{ K} < \Delta T < 6\text{ K}$), more corresponding to EN 1434-1			
response time	s 8			
housing	PEEK, stainless steel 304, copper			
degree of protection	NEMA 4			
dimensions				
length l	in 0.55			
width b	in 1.18			
height h	in 1.06			
dimensional drawing				
weight	lb 0.7 (without connector)			
accessories				
thermal conductivity paste 392 °F	x			
thermal conductivity foil 482 °F	x			
plastic protection plate, insulation foam	x			
Connection system				
direct connection/connection with extension cable				
				
Connection				
	temperature probe	extension cable	connector	
	red	black	2	
	red/blue	green	6	
	white/blue	white	1	
	white	red	7	
Cable				
	temperature probe	extension cable		
type	4 x 0.25 mm² black	4 x 18 AWG		
standard length	ft 9	-		
max. length	ft -	656		
cable jacket	PTFE	LS PVC		

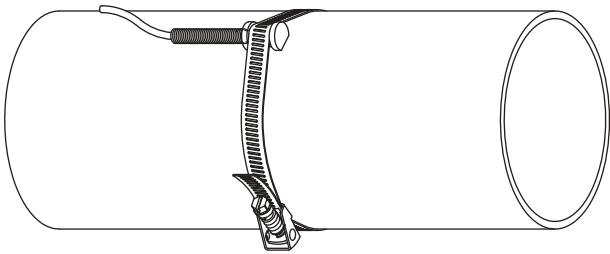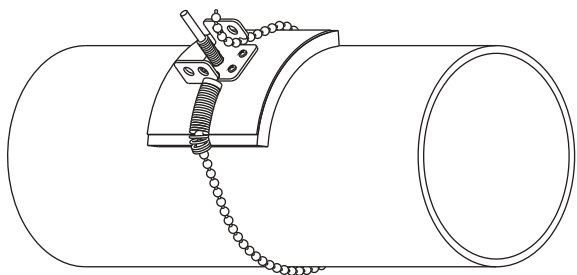Fixation

<p>tension strap PT13N</p>  <p>The diagram shows a cylindrical component with a tension strap PT13N attached to its side. The strap is made of a woven material and has a metal buckle at one end. A small metal fitting is attached to the other end of the strap, which is secured to the cylinder.</p>	<p>material: stainless steel 301, 410 thermal insulation necessary</p>
<p>ball chain PT13F</p>  <p>The diagram shows a cylindrical component with a ball chain PT13F attached to its side. The chain is made of stainless steel 316L and is 3 feet long. It is connected to a metal fitting on the cylinder.</p>	<p>material: stainless steel 316L length: 3 ft</p>

Wall thickness measurement (optional)

The pipe wall thickness is an important pipe parameter which has to be determined exactly for a good measurement. However, the pipe wall thickness often is unknown.

The wall thickness probe can be connected to the transmitter instead of the flow transducers and the wall thickness measurement mode is activated automatically.

Acoustic coupling compound is applied to the wall thickness probe which then is placed firmly on the pipe. The wall thickness is displayed and can be stored directly in the transmitter.


Technical data

		DWR1NZ7
order code		ACC-PO-G601-/W6
measuring range ¹	in	0.04 to 9.8
resolution	in	0.0004
accuracy		1 % ±0.004 in
fluid temperature	°F	-4 to +392, short-time peak max. 932
cable		
type		2616
length	ft	4

¹ The measuring range depends on the attenuation of the ultrasonic signal in the pipe. For strongly attenuating plastics (e.g., PFA, PTFE, PP) the measuring range is smaller.

Cable

		2616
ambient temperature	°F	<392
cable jacket		
material		FEP
outer diameter	in	0.2
color		black
shield		x

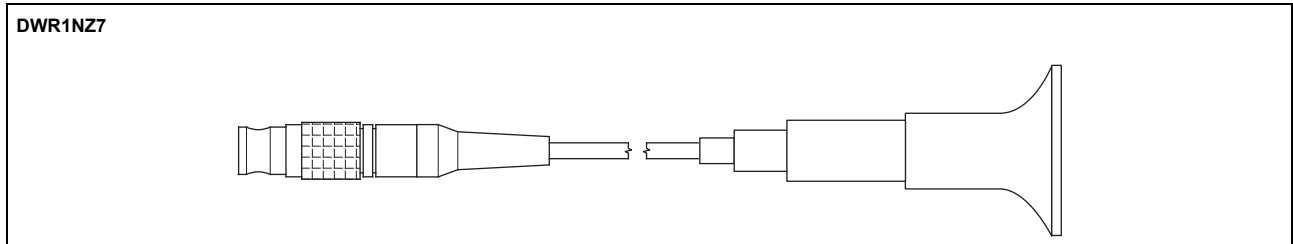

REPRESENTED BY:

CCLYNCH
& ASSOCIATES
The Water Monitoring People

Phone: 1-800-333-2252

Fax: 228-452-2563

info@cclynch.com

www.cclynch.com