


Thermo Scientific Orion Star A214

Advanced pH/ISE benchtop meter

The Thermo Scientific™ Orion™ Star A214 pH/ISE Benchtop Meter works for any lab or application. Its durability and dependability make it ideal for every sample, every day.

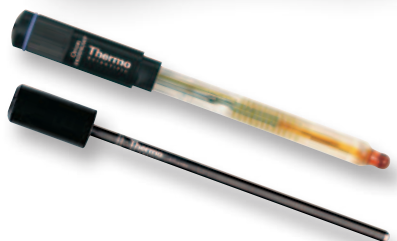

The Thermo Scientific Orion Star A214 pH/ISE Benchtop Meter is the ideal choice for any lab. Get the information you need quickly and easily from the large, backlit graphic LCD display. Informative display shows pH/mV/RmV/ISE and temperature with electrode status, time, date, sample ID, user ID and calibration points.

Features and Benefits

- Easy meter operation assured with on-screen text prompts, menu-specific function keys and a multi-language interface
- Don't miss a reading—AUTO-READ™ locks in the stable reading on your screen, ready indicator alerts when readings are stable and timed reading gathers data in specific time intervals
- Up to 5 point pH calibration with automatic recognition for USA/NIST and DIN buffers or manual option for custom buffer values
- Up to 5 point ISE calibration with optional non-linear auto-blank and low-concentration stability
- Calibration editing to fix individual points without a full recalibration
- Non-volatile memory holds up to 2000 data points with time and date stamp
- Easily transfer data and keep meter software up-to-date with the USB and RS232 ports and complimentary Orion Star Com computer software
- Stir samples with ease using the meter-controlled Orion Star stirrer probe
- Included electrode arm and holder make it easier to maintain probes
- Power the meter using the universal power adapter or four AA batteries
- IP54-rated housing handles splashes and is wall-mountable to save space
- 3 year meter replacement warranty

Thermo
SCIENTIFIC

Thermo Scientific Orion A214 pH/ISE Benchtop Meter

Specifications	
pH	Range: -2.000 to 20.000 Resolution: 0.1, 0.01, 0.001 Relative Accuracy: ±0.002 Calibration Points: Up to 5 Calibration Editing: Yes
mV/RmV	Range: ±2000.0 mV Resolution: 0.1 mV Relative Accuracy: ±0.2 mV or ±0.05 % of reading whichever is greater E_H ORP Mode: Yes
ISE	Range: 0.0001 to 19900 Resolution: 0.0001 minimum, auto ranging, up to 3 significant digits (user selectable) Relative Accuracy: ±0.2 mV or ±0.05 % of reading whichever is greater Units: ppm, M, mg/L, %, ppb, none Calibration Points: Up to 5 Calibration Editing: Yes Calibration Features: Linear point to point, non-linear selectable auto-blank, low concentration range stability
Temperature	Range: -5 to 105 °C, 23 to 221 °F Resolution: 0.1 °C, 0.1 °F Relative Accuracy: ±0.1 °C, ±0.1 °F Offset Calibration: 1 point
Datalogging	Memory: 2000 with time and date stamp Log Function: Manual, ready (includes AUTO-READ), timed
Inputs	pH Electrode or ISE: BNC, reference pin ATC Probe: 8-pin mini-DIN
Output	RS232, USB
Power	AC Adapter: Included—universal, 100-240 VAC Battery Power: Optional—4 AAs Battery Life: 800 hrs

 Thermo Fisher Scientific
Water Analysis Instruments
Chelmsford, MA USA
Quality Management System
Registered to ISO 9001

thermoscientific.com/water

© 2013 Thermo Fisher Scientific Inc. All rights reserved. Certified System StandardsMark logo is a trademark of SAI Global. All other trademarks are the property of Thermo Fisher Scientific Inc. & its subsidiaries

Meter Ordering Information

Part No.	Description
STARA2140	Orion Star A214 pH/ISE Benchtop Meter*
STARA2145	Orion Star A214 pH/ISE Benchtop Meter Kit* - 8102BNUWP Orion ROSS Ultra pH electrode - 927007MD Orion stainless steel ATC probe - 096019 Orion Star stirrer probe - 810199 ROSS pH buffer & solution kit
STARA2146	Orion Star A214 pH/ISE Benchtop Meter Kit for Ammonia* - 8102BNUWP Orion ROSS Ultra pH electrode - 9512HPBNWP Orion high-performance ammonia ISE - 927007MD Orion stainless steel ATC probe - 096019 Orion Star stirrer probe - 951007 Ammonia 1000 ppm standard - 951210 Low-level ammonia ISA - 951213 Ammonia ISE storage solution
STARA2147	Orion Star A214 pH/ISE Benchtop Meter Kit for Fluoride* - 8102BNUWP Orion ROSS Ultra pH electrode - 9609BNWP Orion fluoride ISE - 927007MD Orion stainless steel ATC probe - 096019 Orion Star stirrer probe - 040906, 040907 & 040908 Orion fluoride standards; 1 ppm, 2 ppm & 10 ppm with TISAB II - 940909 Orion TISABII solution, 1 gallon
STARA2148	Orion Star A214 pH/ISE Benchtop Meter Kit for Sodium* - 8102BNUWP Orion ROSS Ultra pH electrode - 8611BNWP Orion ROSS sodium ISE and sodium solutions - 927007MD Orion stainless steel ATC probe - 096019 Orion Star stirrer probe
* All the above configurations come with:	- Attached electrode stand and holder - Universal power adapter - Printed quick start guide and literature CD - USB computer cable

Accessories Ordering Information

Part No.	Description
810199	Orion ROSS All-in-One pH buffer kit
951007	Ammonia standard, 1000 ppm, 475 mL
951210	Low-level ammonia ISA, 475 mL
951211	Ammonia ISA, 475 mL
040906	Fluoride standard, 1 ppm with TISAB II, 475 mL
040907	Fluoride standard, 2 ppm with TISAB II, 475 mL
040908	Fluoride standard, 10 ppm with TISAB II, 475 mL
940909	TISAB II, 1 gallon

For more information, contact your local Thermo Scientific products dealer or call our customer and technical service experts at 1-800-225-1480 (for the US and Canada) or visit www.thermoscientific.com/water.



Redesigned electrode arm and holder

REPRESENTED BY:
CCLYNCH
& ASSOCIATES
The Water Monitoring People

Phone: 1-800-333-2252
Fax: 228-452-2563
info@cclynch.com
www.cclynch.com

Thermo
SCIENTIFIC
Part of Thermo Fisher Scientific

