

Teledyne RD Instruments

ChannelMaster

Horizontal Acoustic Doppler Current Profiler




Open Channel Flow and Water Level On-Line Monitoring

The compact, flexible, and affordable CHANNELMASTER is a horizontally-oriented Acoustic Doppler Current Profiler (H-ADCP) designed to collect high-accuracy water velocity, stage, and discharge data for a wide array of applications.

By leveraging Teledyne RDI's BroadBand technology, ChannelMaster allows you to obtain unmatched data quality, even in low velocities and complex flows, where a single cell cannot provide enough information.

The ChannelMaster's innovative design includes everything you need to collect high-quality data. The standard unit comes equipped with temperature, pressure, pitch and roll sensors, and a vertical beam.

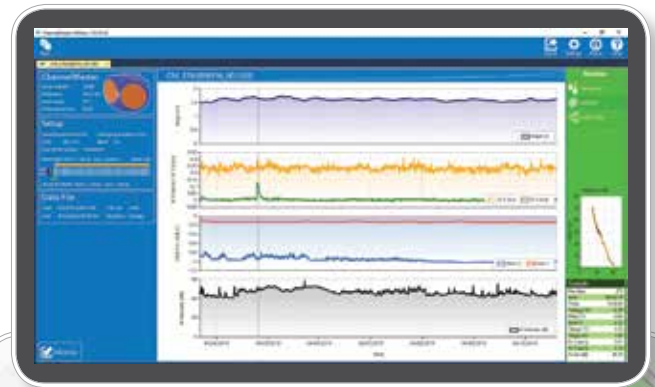

Above right: ChannelMaster H-ADCP data sample.

Right: The ChannelMaster H-ADCP is installed on a riverbank or near-shore structure to acquire real-time velocity, stage, and discharge data.

PRODUCT FEATURES

- **Accurate:** Teledyne RDI Broadband technology allows for small cells and/or short averaging sampling intervals, thus increasing your data accuracy.
- **Robust:** Collect highly accurate velocities even in difficult environments such as slow flow or rapidly changing flow.
- **Versatile:** ChannelMaster offers a range of 1-128 user-selectable cell sizes from 25 cm - 8 m and profiling ranges from 1 m - 300 m (frequency dependent).
- **Sturdy:** Comes standard with stainless steel mounting fixture.

Applications

- **Rivers, Streams, and Irrigation Canals:** Monitor discharge and water level for a variety of applications. The ChannelMaster easily integrates with a telemetry or SCADA system, providing you with remote access to your data.
- **Estuaries:** Measure complex currents for environmental monitoring or circulation model calibrations or verifications.
- **Port and Harbors:** Monitor currents to provide velocity information for vessel maneuvering and safety.



ChannelMaster



Horizontal Acoustic Doppler Current Profiler

TECHNICAL SPECIFICATIONS

		CM300 300 kHz	CM600 600 kHz	CM1200 1200 kHz
Water Velocity Profiling (Broadband mode)	Profiling range	4 m ¹ to 300 m ²	2 m ¹ to 90 m ²	1 m ¹ to 25 m ²
	Velocity range ±5 m/s default, ±20 m/s maximum		
	Accuracy ±0.5% of water velocity relative to ADCP, ±2 mm/s		
	Resolution	1 mm/s	1 mm/s	1 mm/s
	Number of cells	1-128	1-128	1-128
	Cell size	1 m to 8 m	0.5 m to 4 m	0.2 m to 2 m
	Blanking distance	1 m	0.5 m	0.2 m
	Data output rate User-programmable		
Physical Properties	Weight in air	6.8 kg	4.76 kg	3.4 kg
	Weight in water	3.17 kg	2 kg	1.58 kg
	Height	18.3 cm	18.3 cm	18.3 cm
	Width	32.5 cm	26.4 cm	18.3 cm
	Depth	19.8 cm	19.3 cm	18.9 cm
Transducer	Geometry	2 beams, ±20°	2 beams, ±20°	2 beams, ±20°
	Beam width	2.2°	1.5°	1.5°
Standard Sensors	Range:	Temperature -4°C to 40°C	Tilt (pitch and roll) ±10°	Pressure 0.1 m to 10 m ³
	Accuracy:	±0.2°C	±0.2°@2°, ±0.5°@10°	±0.1%, ±3 mm
	Resolution:	0.01°C	0.01°	0.1 mm
				Acoustic Stage 0.1 m to 10 m ³
Software	<ul style="list-style-type: none"> • WinH-ADCP: System setup, data acquisition, discharge calculation, data display, and summary report • PlanCV: Deployment planning, predicting precision, power usage, etc. • ChannelMaster Utilities: System setup and guided site visit workflow including data retrieval 			
Other Hardware and Features	<ul style="list-style-type: none"> • 4mb internal recorder • 25m power and communications cable standard, longer available • Stainless steel mounting plate • Built-in index-velocity method flow calculator 			
Communications	RS-232 with SDI-12, or RS-422		SDI-12 supports v 1.3 (concurrent)	
	Serial baud rates		Simultaneous SDI-12, and internal logging supported 300-115,200 bps	
Construction	Cast polyurethane with titanium hardware, mounting plate included			
Power	Voltage:		10-18VDC	
	Max. current:		1.5A	
	Power consumption:		0.1W @ 10% duty cycle (typical)	
Environmental	Operating temperature:		-5°C to 45°C	
	Storage temperature:		-20°C to 50°C	

1. Assume one good cell (minimum cell size); range measured from the transducer surface.
 2. Assume fresh water; actual range depends on temperature and suspended solids concentration.
 3. User-programmable to 18m maximum.